



Preferred by the pros.™ Tub & Shower Rough-in valve(2-Way)

SPECIFICATIONS




Features

- Pro versa Tub & Shower Rough-in valve(2-way) w/integral stops
- Pressure Balance Valve with built-in diverter function (Non-Share)
- Function Limiter included to reduce to Single Function
- Pro-Versa Ceramic Disc Cartridge (Included with the Mainline 611 Series trim)
- Includes Plaster Guard and Pressure-Test Cap
- Flow Rate: 26.5 LPM/7.0 GPM at 60 psi
- **Brass Construction**
- 1/2''-14 NPT Connection
- With Check Valve
- Adjustable temperature limit stop to control maximum hot water
- Suited for standard Back-to-back and thin wall installation
- Easy-to-access mounting system (Hardware included)
- 100% Factory Tested





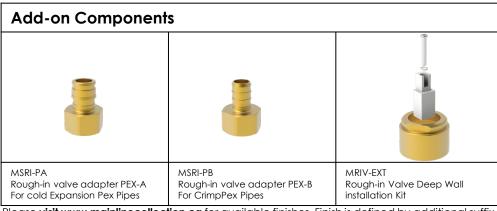

Please visit www.mainlinecollection.ca for available finishes. Finish is defined by additional suffix,

Specified model meets or exceeds the following:


- ASME A112.18.1/CSA B125.1
- IAPMO/cUPC

AVAILABLE MODELS

M410 - Tub & Shower Rough-in Valve

Mainline products have been manufactured under the highest standards of quality and workmanship. That is why we offer "Limited Lifetime" warranty on the function and finish of our rough-in valves.

Drawings

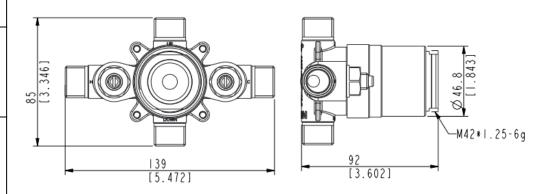

SUBMITTAL INFORMATION

Contractor:
Contact #:
-